
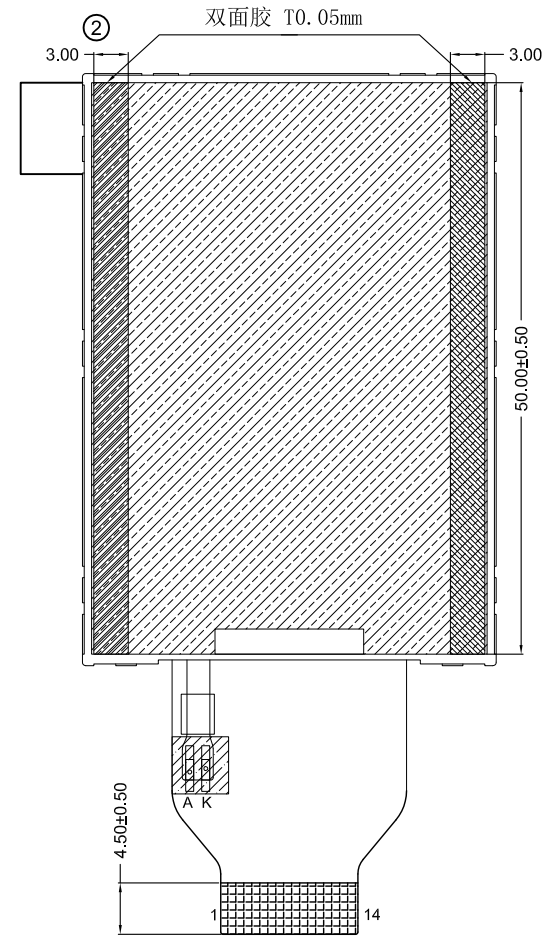
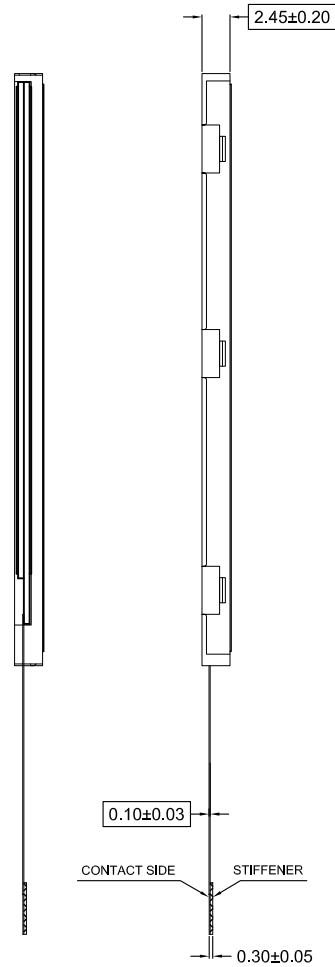


Revised Record

1.0 New Issue

2017-02-20

NO.	Signal
1	LED_A
2	LED_K
3	GND
4	CSB
5	RESET
6	A0
7	SCL
8	SDA
9	VDD
10	VSS
11	IOVCC
12	NC
13	NC
14	GND

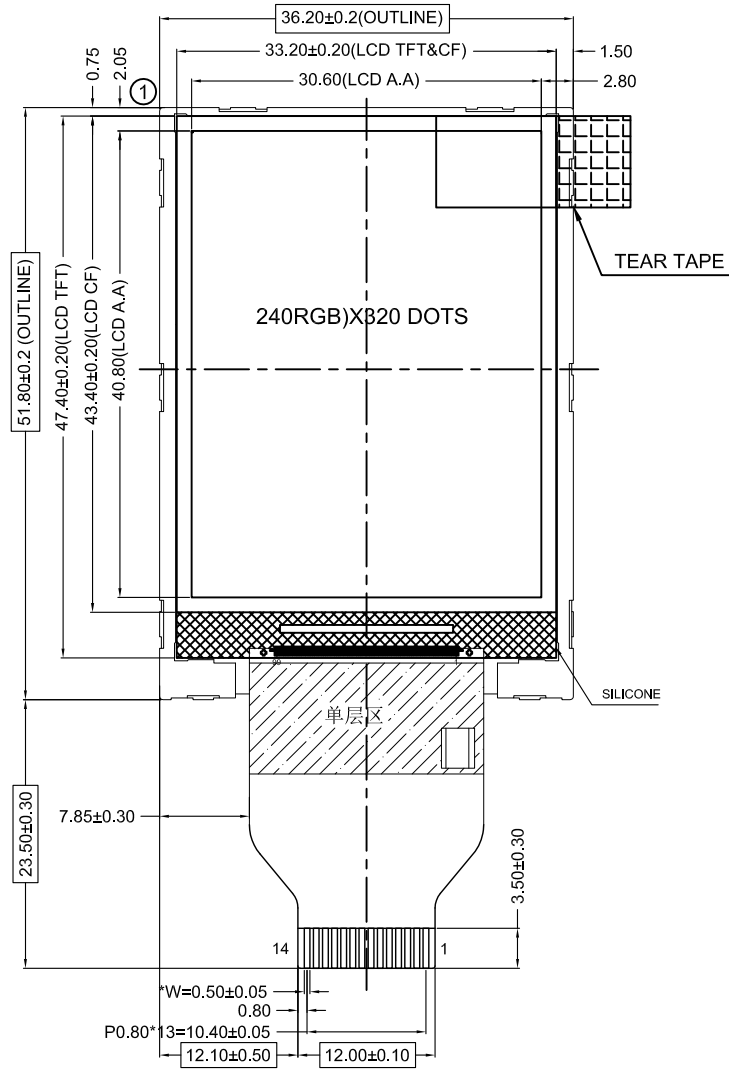

BLAZE Blaze Display Technology Co.,Ltd.


DISPLAY TYPE:	2.0" TFT	DISPLAY DRIVER:	ST7789V	PIXEL PITCH:	0.1275 X 0.1275 mm
POLARIZER MODE:	TRANSFLECTIVE	OPERATING TEMP:	-10°C TO +60°C	LCM BRIGHTNESS (CD/M ²):	
VIEWING DIRECTION:	Full View	STORAGE TEMP:	-20°C TO +60°C	BACK LIGHT:	LED WHITE(X3), 并联
Dot matrix:	240(RGB)X320 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

DESIGNED BY: BDT-23

BDT-T2014-01-SERIES

VERSION: 1.0

CHECKED BY: BDT-09



PAGE 1 OF 1

APPROVED BY: BDT-05

UNIT: mm

Website: <http://www.blazedisplay.com>

DATE: 2017-02-20